

Premium Lifting Castors with Operating Lever

Premium Lifting Castors with Plate, Fixed Operating Lever, Plastic Tread

Materiál:

Vidlica: Oceľ, pozinkovaná, pasivovaný na modro.

Behúň: PA 6, 70 Shore D, white.

Teleso kolesa: PA 6, screwed.

Montáž kolesa: klzné ložisko.


Otočné ložisko: dvojité guľový veniec.

Truck lock: steel with rubber pad.

Mountable, castor-based machine foot with brake for easy repositioning of machines and production units indoors. With reduced rotation backlash.

Teplotný rozsah: -25°C do +80°C.

Reduced load capacity at over +35°C.

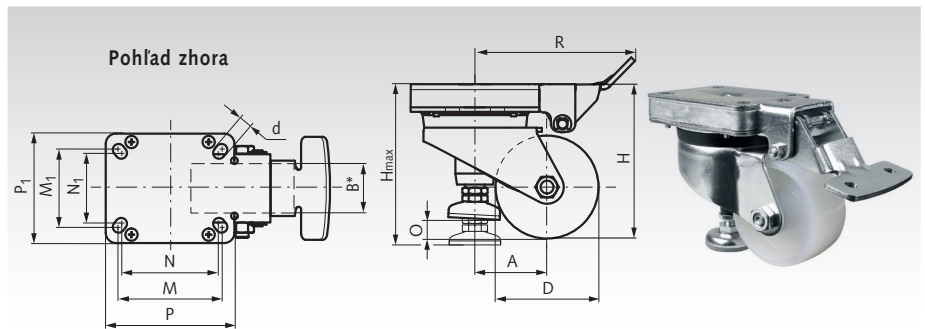

Informácie potrebné na objednanie: napr.: Produkt č. 77785080, Lifting castor with fixed operating lever, plastic, Ø 80mm

Produkt č.	D mm	B mm	H mm	H _{max} mm	A mm	R mm	d mm	P mm	P ₁ mm	M mm	M ₁ mm	N mm	N ₁ mm	O mm	Nosnosť kg	Hmotnosť kg
777 850 80	80	37	120	122	56	124	9	100	85	80	60	76	55	13	230	2,1
777 851 00	100	37	140	142	65	124	9	100	85	80	60	76	55	13	230	2,2

Premium Lifting Castors with Plate, Fixed Operating Lever, Polyurethane Tread

Materiál:

Vidlica: Oceľ, pozinkovaná, pasivovaný na modro.

Behúň: polyurethane, 92 Shore A, brown.

Teleso kolesa: diecast aluminum.

Montáž kolesa: guľčkové ložisko.

Otočné ložisko: dvojité guľový veniec.


Truck Lock: steel with rubber pad.

Mountable, castor-based machine foot with brake for easy repositioning of machines and production units indoors. With reduced rotation backlash.

Teplotný rozsah: -20°C do +70°C

(krátkodobu do +90°C).

Reduced load capacity at over +40°C.

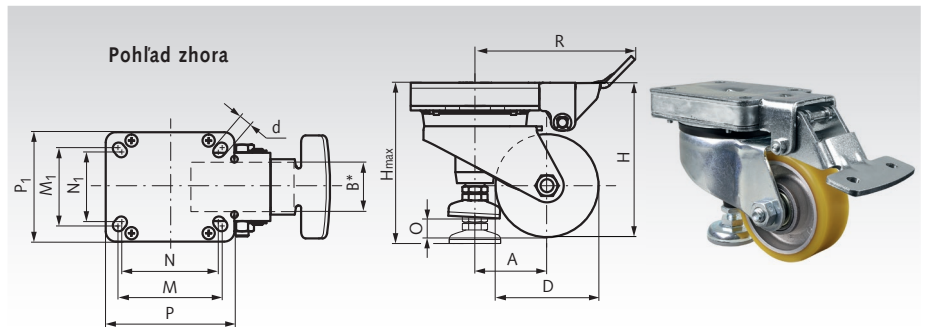

Informácie potrebné na objednanie: napr.: Produkt č. 77786080, Lifting castor with fixed operating lever, polyurethane, Ø 80mm

Produkt č.	D mm	B mm	H mm	H _{max} mm	A mm	R mm	d mm	P mm	P ₁ mm	M mm	M ₁ mm	N mm	N ₁ mm	O mm	Nosnosť kg	Hmotnosť kg
777 860 80	80	30	120	122	56	124	9	100	85	80	60	76	55	13	200	2,1
777 861 00	100	40	140	142	65	124	9	100	85	80	60	76	55	13	230	2,2

Poznámka

The lifting castor has a fixed operating lever that works independently of the swivel movement of the castor. The foot lever extends the base so that the castor is lifted off the floor.

When the lever is released, the foot rises and the castor returns to its active position. The lever can be operated in any castor position. Two castors can be connected by a bar so that both feet are extended simultaneously.

When not in use, a high ground clearance is maintained.

Suitable for applications with frequent changes between stable and mobile use.

Height adjustment while stationary or during operation is not possible. The static load capacity of the truck lock per lifting castor is 1000 kg.

* Šírka kolesa