


Dvojradové ozubené kolesá ZRS s nábojom, ANSI 40-2

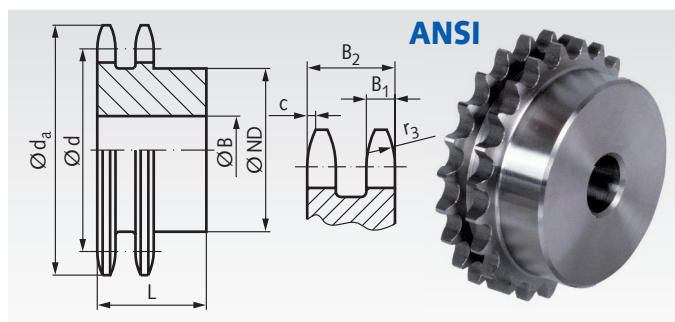

Materiál: Oceľ C45, neklaená.
Predvrtané.


Informácie potrebné na objednanie napr.: Produkt č. A12511000, ZRS, ANSI 40-2, 10 zubov

ANSI 40-2 (ASA 08 A-2), Rozteč 1/2"

$B_1 = 7.2$ mm, $B_1 = 21.6$ mm, $c = 1.6$ mm, $r_3 = 13.5$ mm

Produkt č.	Počet zubov	d_a mm	d mm	ND mm	B mm	L mm	Hmot. kg
A125 110 00	10	46,4	41,10	28	10	32	0,190
A125 111 00	11	50,5	45,08	32	12	35	0,276
A125 113 00	13	58,7	53,07	38	12	35	0,373
A125 114 00	14	62,7	57,07	42	12	35	0,451
A125 115 00	15	66,8	61,08	46	12	35	0,535
A125 116 00	16	70,8	65,10	50	14	35	0,615
A125 117 00	17	74,9	69,12	54	14	35	0,714
A125 118 00	18	78,9	73,14	58	14	35	0,819
A125 120 00	20	87,0	81,18	66	14	35	1,06
A125 121 00	21	91,1	85,21	70	16	40	1,31
A125 122 00	22	95,1	89,24	70	16	40	1,40
A125 123 00	23	99,2	93,27	70	16	40	1,49
A125 124 00	24	103,2	97,30	75	16	40	1,66
A125 125 00	25	107,3	101,33	80	16	40	1,85
A125 126 00	26	111,3	105,36	85	20	40	2,01
A125 127 00	27	115,4	109,40	85	20	40	2,12
A125 128 00	28	119,4	113,43	90	20	40	2,33
A125 130 00	30	127,5	121,50	100	20	40	2,78
A125 135 00	35	147,8	141,68	100	20	40	3,46
A125 138 00	38	159,9	153,79	100	20	40	4,14

Dvojradové ozubené kolesá ZRL bez náboja, ANSI 40-2

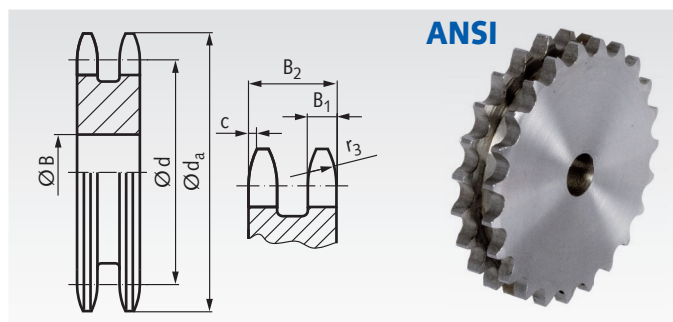


Materiál: Oceľ, neklaená.
Predvrtané.

Informácie potrebné na objednanie napr.: Produkt č. A12525700, ZRL, ANSI 40-2, 57 zubov

ANSI 40-2 (ASA 08 A-2), Rozteč 1/2"

$B_1 = 7.2$ mm, $B_1 = 21.6$ mm, $c = 1.6$ mm, $r_3 = 13.5$ mm

Produkt č.	Počet zubov	d_a mm	d mm	B mm	Hmot. kg
A125 257 00	57	236,7	230,54	25	6,59
A125 276 00	76	313,6	307,32	25	11,92
A125 283 00	95	390,4	384,11	25	18,84



Úpravy možné do
24h.
Zákazkové diely na
vyžiadanie.