

MAE 657.5 / MAE 657.6 T-Slot Nuts for Construction Profile, Type i Modular System


Material: Steel Zinc-plated.

T-slot nuts enable the secure fastening of attachments in profile grooves.

They can be inserted from the side or swiveled into place, and - thanks to spring-loaded elements - reliably maintain their position.

Variants with anti-rotation features automatically align themselves within the slot and prevent twisting.

Ordering Details: e.g.: Product No. MAE 657.5-5M3, T-Slot Nut for Construction profile, Type 1, Slot 5 mm

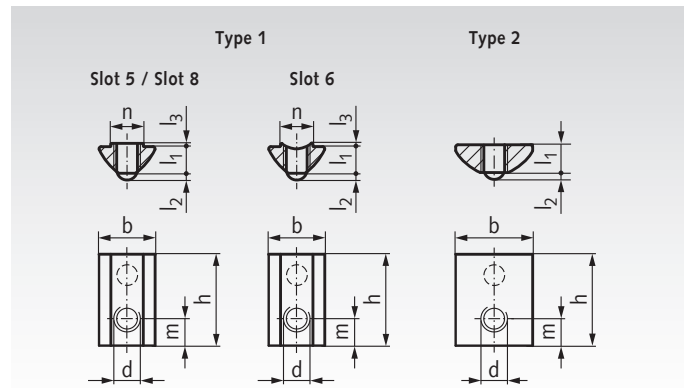

Type 1 - T-Slot Nuts with spring-loaded Ball, swivel-in, with anti-rotation Feature

Product No.	Slot mm	d mm	b mm	h mm	l ₁ mm	l ₂ mm	l ₃ mm	m mm	n mm	Weight g
MAE 657.5-5M3	5	M3	7,7	12	4	1	0,6	4	4,9	2
MAE 657.5-5M4	5	M4	7,7	12	4	1	0,6	4	4,9	2
MAE 657.5-5M5	5	M5	7,7	12	4	1	0,6	4	4,9	2
MAE 657.5-6M3	6	M3	10,5	17	6,3	1	0,6	4,5	6,5	5
MAE 657.5-6M4	6	M4	10,5	17	6,3	1	0,6	4,5	6,5	5
MAE 657.5-6M5	6	M5	10,5	17	6,3	1	0,6	4,5	6,5	5
MAE 657.5-6M6	6	M6	10,5	17	6,3	1	0,6	4,5	6,5	5
MAE 657.5-8M4	8	M4	13,5	22	6,4	1,75	0,8	6,5	7,8	11
MAE 657.5-8M5	8	M5	13,5	22	6,4	1,75	0,8	6,5	7,8	11
MAE 657.5-8M6	8	M6	13,5	22	6,4	1,75	0,8	6,5	7,8	11
MAE 657.5-8M8	8	M8	13,5	22	6,4	1,75	0,8	6,5	7,8	11




Type 2 - T-slot Nuts with spring-loaded Ball, slide-in, heavy Version


Product No.	Slot mm	d mm	b mm	h mm	l ₁ mm	l ₂ mm	m mm	Weight g
MAE 657.6-8M6	8	M6	18	23	6,8	1,8	6,5	16
MAE 657.6-8M8	8	M8	18	23	6,8	1,8	6,5	15



Assembly Instructions

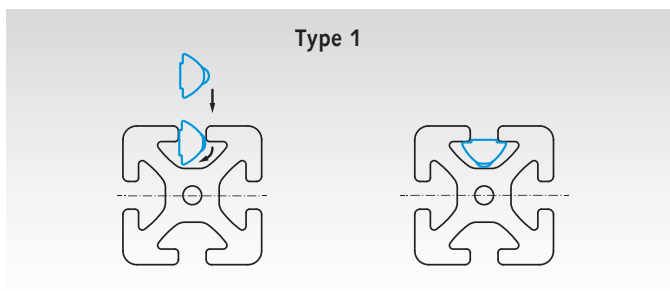

Insert the T-slot nut vertically into the slot and rotate it 90 degrees until it locks into place.

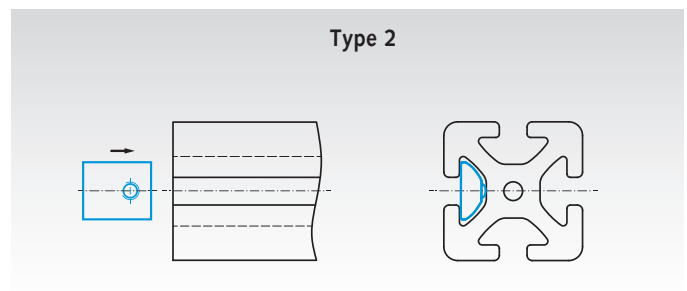

Slide the nut laterally into the slot to the desired position.