

Dvojradové valčkové reťaze ANSI DIN ISO 606 (prv DIN 8188), premium


Materiál: Špeciálna reťazová ocel.

Premium duplex roller chains, developed for low wear. Produced in consistently high quality. From size 40 with seamless bushes. From size 80 with lube groove bushes. Waisted link plates. Dynamically prestretched. Chains are supplied with an uneven number of links, with inner links at both ends. Connecting links with ring coin plate for higher strength.

Teplotný rozsah: -10° do +60°C.

Iné teploty sú možné iba s použitím špeciálneho maziva.

Informácie potrebné na objednanie: napr.: Produkt č. A12060000W, Dvojradová valčková reťaz ANSI 25-2, premium

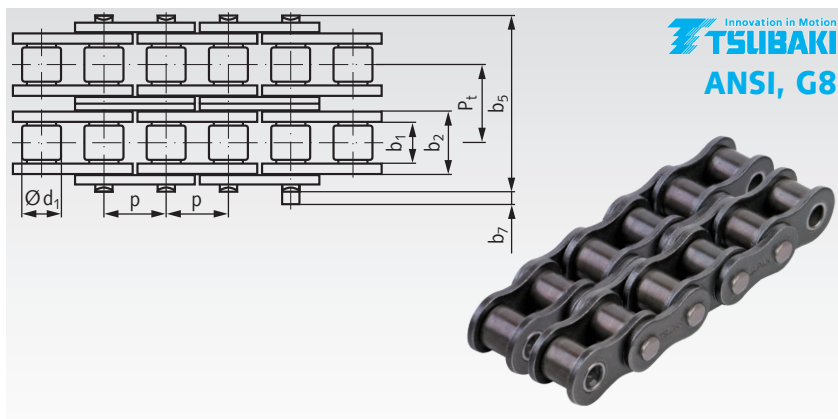

ANSI / DIN ISO - č. (ASA)	Produkt č.	Rozsteč x Vnútna šírka		Vnútna šírka b ₂ mm	Valček- Ø d ₁ mm	Šírka kolíka b ₅ mm	Priečna rozsteč P _t mm	Presah cez b ₇ mm	Pevnostné zaťaženie min. kN	Hmotnosť kg/m
		p x b _{1min} mm	p inch							
25-2 ¹⁾ (04C-2)	A120 600 00W ¹⁾	6,35 x 3,10	1/4	4,68	3,3	14,0	6,4	0,7	8,24	0,27
35-2 ¹⁾ (06C-2)	A121 000 00W ¹⁾	9,525 x 4,68	3/8	7,28	5,08	21,6	10,1	1,1	19,6	0,69
40-2 (08A-2)	A125 000 00W	12,7 x 7,85	1/2	10,95	7,92	30,9	14,4	1,7	35,3	1,27
50-2 (10A-2)	A126 000 00W	15,875 x 9,40	5/8	13,53	10,16	38,7	18,1	1,8	56,9	2,07
60-2 (12A-2)	A127 000 00W	19,05 x 12,57	3/4	17,5	11,91	48,5	22,8	2	80,4	3,04
80-2 ²⁾ (16A-2)	A128 000 00W ²⁾	25,4 x 15,75	1	22,6	15,88	61,8	29,3	3	143	5,27

¹⁾ Púzdrová reťaz (bez valčkov).

²⁾ S mazacími drážkovými puzdrami.

Prosím pozor: Balenie je 3,05m s uzamykacím článkom.

Ak potrebujete špeciálnu dĺžku, napíšte nám dĺžku a počet článkov (nepárne číslo!).

Pre špeciálne dĺžky, spájacie články musia byť objednané zvlášť.

Spájacie články pre dvojradové valčkové reťaze ANSI DIN ISO 606 (prv DIN 8188), premium

Materiál: Špeciálna reťazová ocel.

Informácie potrebné na objednanie: napr.: Produkt č. A12060300W, Spájací článok č. 11/E, ANSI 25-2, premium



č. 11/E: Spájací článok s pružným klipom

č. 10/S: Spájací článok s závlačkou

ANSI / DIN ISO č. (ASA)	Produkt č. Hmotnosť		Produkt č. Hmotnosť	
	Spojovací článok č. 11/E	g	Spájací článok č. 10/S	g
25-2 (04C-2)	A120 603 00W	2	-	-
35-2 (06C-2)	A121 003 00W	7	-	-
40-2 (08A-2)	A125 003 00W	17	-	-
50-2 (10A-2)	A126 003 00W	24	-	-
60-2 (12A-2)	A127 003 00W	39	-	-
80-2 (16A-2)	-	-	A128 002 00W	122

Innovation in Motion
TSUBAKI
ANSI, G8