## Foil Eraser / Eraser Disc with threaded Axle and Adapter

Materiál: Body: Rubber SBR, hardness 50° Shore A, yellow. Axle: Steel, zinc-plated.


For gently removing stickers, adhesive residue and film without damaging the underlying paint, coating or material underneath; please follow the notes on this page.

Recommended operating temperatur: +15°C to +40°C.

Foil eraser and adapter have to be ordered separately.

Informácie potrebné na objednanie: napr.: Produkt č. 14073421, Foil eraser Produkt č. 14073422, Adapter

Produkt č.	Product	max. otáčky	Hmotnosť
		min <sup>-1</sup>	g
140 734 21	Foil eraser	4000	200
140 734 22	Adapter	not specified	20

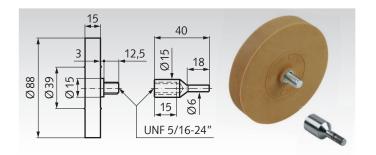

## Poznámky

- Do not use on plastic parts and painted plastics (e.g. car bumpers, motorbike fairings).
- Do not work too long in one place to avoid excessive heat build-up.
- To avoid damaging the paintwork, do not apply too much pressure.
- Use personal protective equipment while working.
- Suitable for all common drillings, cordless screwdrivers and straight grinders.
- At water-based paints, discolouration may occur. Preliminary tests are recommended on non-visible areas.
- Too high rotation speed can lead to smearing of the adhesive residues (excessive heat development).
- As soon as the disc diameter has reached the wear indicator, the product may not be used any longer.
- Note the direction of rotation: against the working direction.
- For cleaning after use, an adhesive and sealant remover should be used to remove any remaining residue.

